# Ubiform+ 600mm x 5m Black

Article number: 539005

ubbink
Build smart.

## Product overview

Ubiform + is a universal self-adhesive flashing that is easy to install without the need for specialised tools. Thanks to its band of aluminium it is extremely durable and lightweight. The creped aluminium allows Ubiform + to stretch up to 60% of its initial dimension and is also resistant to UV and weathering.

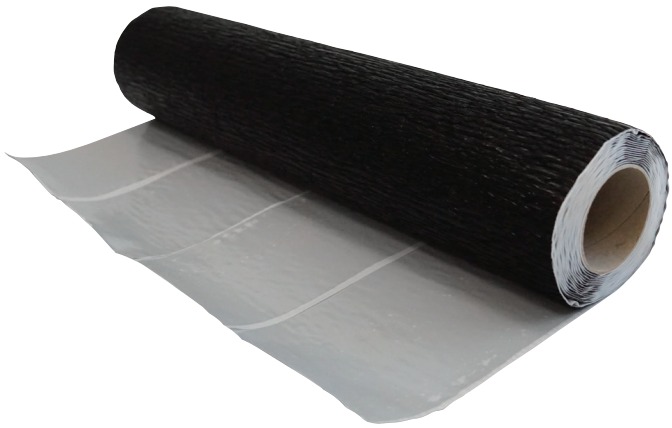

The lower adhesive layer uses a high bond butyl adhesive, the innovative system replaces conventional flashings made of zinc, copper or lead when a cost-efficient, simple and fast junction seals are required still ensuring a comparatively high and long lasting seal quality.

- Lightweight and easy to handle
- Fully self adhesive rolls
- Quick and easy to install
- Suits most conventional flashings
- A practical and cost-effective solution consisting of a full surface self-adhesive profiled aluminium roll
- Secure and fast alternative to sheet lead flashings in most typical junction points
- Overlapping adhesion without any problem
- Optimum adhesion thanks to a high bond butyl layer
- Foil reinforced on the reverse
- UV-stable and weather-resistant

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-28-05-2026-UK-EN

# Ubiform+ 600mm x 5m Black

Article number: 539005

ubbink
Build smart.

## Product dimensions

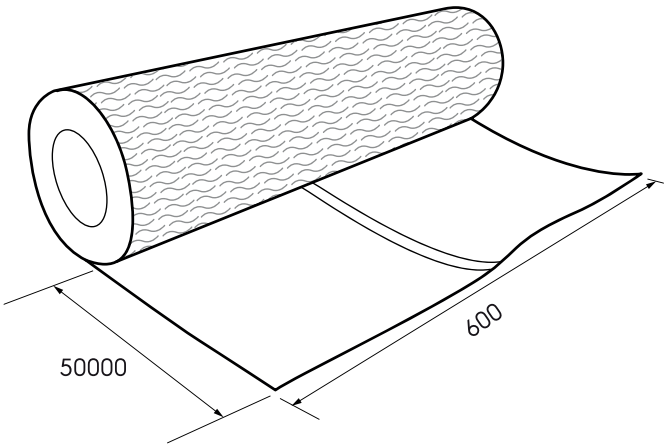


## Applications

- Recommended fixing methods:
- The ideal solution for junctions with flues, masonry and construction materials

## Compliance, safety and regulation

- Width elasticity ability up to 60%
- Temperature resistance from -30°C to +80 °C
- Application temperature: + 5° C to + 30 ° C.

## Kit contents

- X1 Roll only

## Product support

- Material:
- Self-adhesive stretched aluminium with baked enamel coating, foil reinforcement on the reverse with full butyl adhesive layer
- Available in:
- Grey or Black

## Technical specifications

| Technical | |
|---|---|
| Colour | Black |
| Material | Butyl |
| **Performance** | |
| Temperature resistance (min.) | -40 °C |
| Temperature resistance (max.) | 100 °C |
| Reinforcement | ☒ |
| Self adhesive | ☑ |
| Stretch length | 60 % |
| Stretch width | 60 % |
| **Dimensions** | |
| Length gross | 5 m |
| Length gross | 5000 mm |
| Width | 600 mm |
| Height | 1.4 mm |
| Thickness | 1.4 mm |

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-28-05-2026-UK-EN

# Ubiform+ 600mm x 5m Black

Article number: 539005

Build smart.

## Technical specifications (continuation)

| Dimensions | |
|---|---|
| Net weight | 5.65 kg |

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-28-05-2026-UK-EN