

Flashing Universal Ubiflex Solar PV Cable Entry

Tile Black



Article number: 770206



Build smart.

Product introduction

This Ubbink terminal can be used to feed solar PV cables through pitched roofs. The cable entry tile for solar panels is UV resistant and suitable for most types of roofs, 15 - 55°. It allows the passage of up to 6 cables with a diameter ranging from 4 to 8 mm. Since the cables do not have to be passed between the tiles, there is no risk of tile breakage or cable wear over time. The Ubiflex skirt guarantees the tightness of the cable entry and perfectly matches the shape of the tile.

- Universal design
- Air and watertight
- Easy and quick installation

Product dimensions

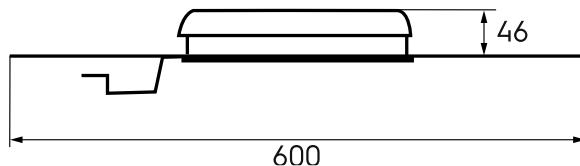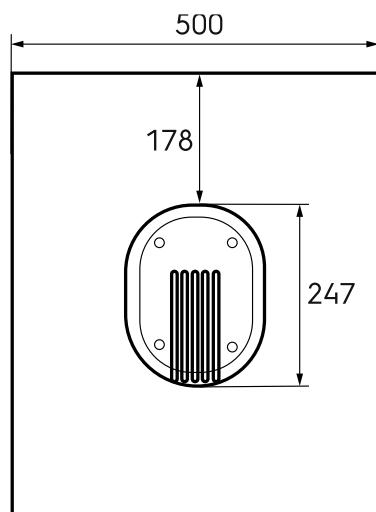

Additional information

Cable cover: High density polyethylene (HDPE)

Skirt: Ubiflex

Flashing Universal Ubiflex Solar PV Cable Entry

Tile Black



Article number: 770206

Build smart.

Technical specifications

Specifications	
Technical	
Colour	Black
Material	Plastic
Flashing material	Ubiflex standard
Installation	
Roof type	Pitch
Dimensions	
Length gross	600 mm
Width	500 mm
Height	46 mm
Net weight	1.86 kg