# © 2025 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country.1 UB-02-04-2025-UK-EN

## Contego Wall Terminal 180mm Black Grey



Build smart.


Article number: 188842


### **Product introduction**

The Contego Wall Terminal is suitable for central mechanical ventilation, handling both supply and extract air via Aerfoam insulated ducts. It prevents water drips, minimizes dirt build-up, and has a bottom grille to block pests. Made of durable, UV-resistant PP, its black-grey matte finish blends with walls. Installation is quick, with a wall-mounted base for easy access and a cap that clips on top.

- Suitable for air supply or air extract
- Quick and easy installation allowing for easy access
- Made from durable and UV-resistant PP material
- Designed to prevent water dripping down the wall, dirt build-up around the terminal and pests from entering
- Adapts to all types of wall finishes thanks to its modern, discreet design

## **Product dimensions**

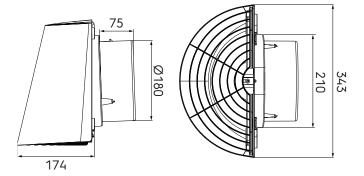









# © 2025 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country. I UB-02-04-2025-UK-EN

## Contego Wall Terminal 180mm Black Grey



Article number: 188842

## **Technical specifications**

Specifications	
Technical	
Colour	Anthracite
Colour indication	RAL 7021
Material	PP
Diameter	180 mm
Airflow direction	Supply / extract
Dimensions	
Length gross	266 mm
Width	343 mm
Height	282 mm
Net weight	0.69 kg

# © 2025 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country.1 UB-02-04-2025-UK-EN

## Contego Wall Terminal 180mm Black Grey



Article number: 188842

### **Technical details**

180 mm	Air Supply Air Extrac		xtract	
Zeta [-]	1,19		1,88	
Qv [m³/h]	v [m/s]	Δp [Pa]	v [m/s]	∆p [Pa]
0	0,0	0,0	0,0	0,0
50	0,5	0,2	0,5	0,3
100	1,1	0,8	1,1	1,3
150	1,6	1,9	1,6	3,0
200	2,2	3,3	2,2	5,3
250	2,7	5,2	2,7	8,3
300	3,3	7,5	3,3	11,9
350	3,8	10,2	3,8	16,2
400	4,4	13,4	4,4	21,1
450	4,9	16,9	4,9	26,8
500	5,5	20,9	5,5	33,0