

Cable and pipe roof terminal 55 0° Alu PVC insulated

Article number: 0770227


Product introduction

The insulated cable and pipe penetration system offers a smart, fire-safe installation method by using a hot air gun instead of a burner, ensuring safety and convenience during work. The hinged hood ensures easy access, while the diameter effortlessly accommodates electrical cables. An integrated bird and blade guard keeps the system protected from external elements. Compatible with universal and brand-independent systems, this feed solution is versatile and designed for fast, reliable performance in any set-up.

- Hinged hood for easy installation
- Integrated bird and leaf protection
- Ideal for easy placement of cable bundles
- Compatible with universal and brand-independent systems
- Easy and fire-safe installation by using a hot air gun instead of a burner



Product dimensions

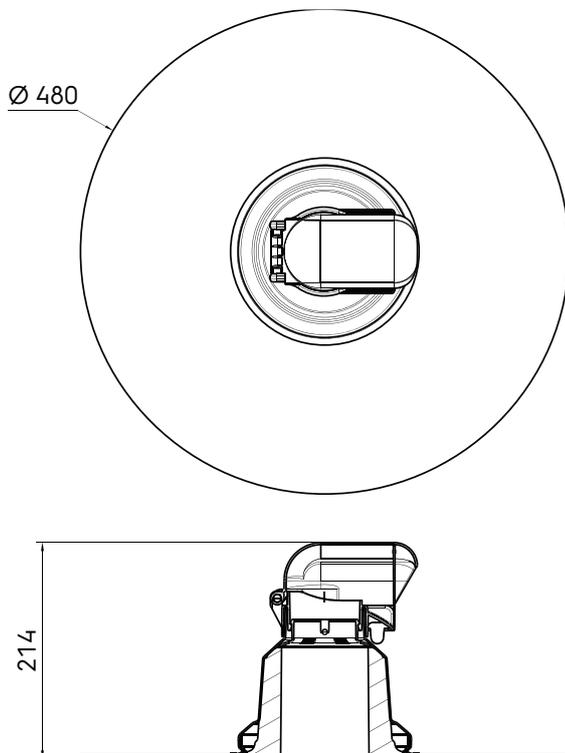

Cable and pipe roof terminal 55 0° Alu PVC insulated

Article number: 0770227

Technical specifications

Specifications	
General	
Article type	Cable ducts
Technical	
Colour	Black
Material	ALU/PP
Bird protection	<input checked="" type="checkbox"/>
Indent	<input checked="" type="checkbox"/>
Adhesive plate diameter	480 mm
Adhesive plate height	150 mm
Framing material	Armour plan SM
Insulated	<input checked="" type="checkbox"/>
	55
Performance	
Can be glued	<input checked="" type="checkbox"/>
Self-adhesive	<input type="checkbox"/>
UV resistance	<input checked="" type="checkbox"/>
Installation	
Roof type	Flat
Roof angle (min.)	0 °
Roof angle (max.)	0 °
Dimensions	
Length	480 mm
Width	480 mm
Height	214 mm
Height above roof	214 mm
Logistics	
Gross weight	1.037 kg
Packaging/length	393 mm
Packaging / width	393 mm
Packing / height	260 mm