

UB46/47/48 & 49 Universal Insulated Terminals

Product features and benefits

- Stack terminals for tiles/slates
- Insulated through the cowl

Application

- Mechanical extraction
- Minimum pitch of 25°
- **UB46,47 & 49 low pitch 5-25° also available**

Material

- Injection moulded/Vacuum formed/Ubiflex Construction

Weight


- UB46 1.9kg
- UB47 3.85kg
- UB49 2.85kg
- UB48 3.57kg

Packaging

- 1 per box

Performance

- UB47 150mm diameter provides 19,000mm² free vent area
- UB48 180mm diameter provides 19,100mm² free vent area
- UB49 160mm diameter provides 18,750 free vent area
- The pressure airflow resistance of all units is <1.0 Pascal at 225m³/h

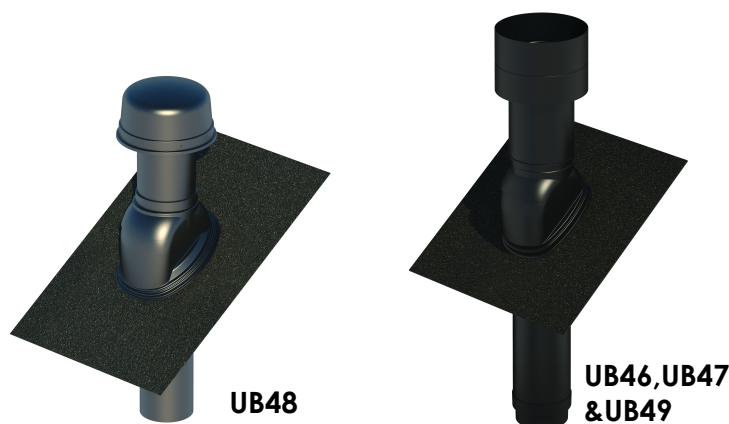

Colours

- Black

Product Code

- UB46/125mm 50142723
- UB47/150mm 50142832
- UB48/180mm 50142953
- UB49/160mm 50142844

Dimensions	Stack Terminal (mm)	Hole size in Roof (mm)	Flashing (mm)
UB46	1156 x 125	166	500 x 600
UB47	1156 x 150	166	500 x 600
UB48	1227 x 180	186	700 x 1000
UB49	1156 x 125	166	500 x 600

***Please Note:** The UB46,47 & 49 are supplied with reducers