

Air Excellent 2x AE35SC Floor Grille Adaptor


Article number: 188308

Product introduction

An AE35SC duct accessory. Use a AE35SC seal & click ring to connect a AE35SC duct to it.

- Modular manifolds, which can be used with all 6 duct types
- Semi-rigid plastic ducts on a roll and airtight mechanical connections, which are extremely easy to install
- Low system pressure loss due to radial design
- Airtight (class D/ATC 2 up +/- 2000 Pa) thanks to mechanical connections, which minimises fan energy use and sound production
- TÜV SÜD and ISEGA tested and certified, REACH compliant

Product dimensions

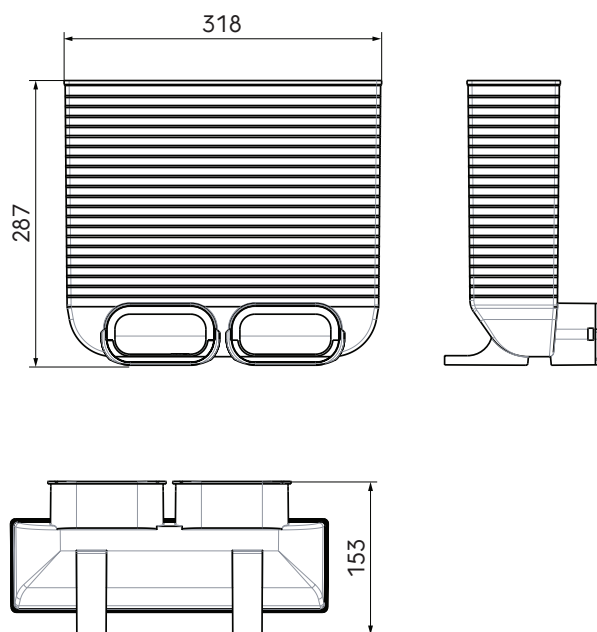

Performance

Airtightness Class D for Air Excellent ductwork, Air Excellent ductwork accessories and the Air Excellent plastic distribution boxes. Tested according to TÜV SÜD Standard TAK 01-2013 (system pressure: + 2000 Pa/- 2000 Pa)

Air Excellent 2x AE35SC Floor Grille Adaptor

Article number: 188308

Technical specifications

Specifications	
Technical	
Colour	Green
Material	PP
Anti static	<input checked="" type="checkbox"/>
Antimicrobial	<input checked="" type="checkbox"/>
Performance	
Temperature resistance (min.)	-20 °C
Temperature resistance (max.)	60 °C
Reaction to fire: Euro class	E
Dimensions	
Length gross	318 mm
Width	153 mm
Height	287 mm
Net weight	0.76 kg

Air Excellent 2x AE35SC Floor Grille Adaptor



ubbink

Build smart.

Article number: 188308

Technical details



Zeta [-]	Air supply without grille				Air supply with grille			
	0,84		0,64		1,25		2,39	
Duct runs	1		2		1		2	
Qv [m³/h]	v [m/s]	Δp [Pa]	v [m/s]	Δp [Pa]	v [m/s]	Δp [Pa]	v [m/s]	Δp [Pa]
0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0
5	0,5	0,1	0,2	0,0	0,5	0,2	0,2	0,1
10	0,9	0,4	0,5	0,1	0,9	0,6	0,5	0,3
15	1,4	0,9	0,7	0,2	1,4	1,4	0,7	0,7
20	1,8	1,6	0,9	0,3	1,8	2,5	0,9	1,2
25	2,3	2,6	1,1	0,5	2,3	3,8	1,1	1,8
30	2,7	3,7	1,4	0,7	2,7	5,5	1,4	2,6
35	3,0	4,5	1,6	1,0	3,0	6,6	1,6	3,6
40	3,2	5,1	1,8	1,3	3,2	7,5	1,8	4,7
45	3,6	6,6	2,1	1,6	3,6	9,8	2,1	5,9
50	4,1	8,4	2,3	2,0	4,1	12,4	2,3	7,3
55	4,6	10,3	2,5	2,4	4,6	15,3	2,5	8,9
60	5,0	12,5	2,7	2,8	5,0	18,6	2,7	10,6
65	-	-	3,0	3,3	-	-	3,0	12,4
66	-	-	3,0	3,4	-	-	3,0	12,7
70	-	-	3,2	3,8	-	-	3,2	14,4
75	-	-	3,4	4,4	-	-	3,4	16,5
80	-	-	3,6	5,0	-	-	3,6	18,8
85	-	-	3,9	5,7	-	-	3,9	21,2
90	-	-	4,1	6,4	-	-	4,1	23,8
95	-	-	4,3	7,1	-	-	4,3	26,5
100	-	-	4,6	7,9	-	-	4,6	29,3
105	-	-	4,8	8,7	-	-	4,8	32,3
110	-	-	5,0	9,5	-	-	5,0	35,5