2024 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country. I UB-13-02-2024-INT-EN

Air Excellent AE23C Click Ring



Build smart.


Article number: 188390

Product introduction

An AE23C duct accessory used to make airtight mechanical connections without tape or sealant. Must be used with an AE23C seal ring.

- Modular manifolds, which can be used with all 6 duct types
- Semi-rigid plastic ducts on a roll and airtight mechanical connections, which are extremely easy to install
- Low system pressure loss due to radial design
- Airtight (class D/ATC 2 up +/- 2000 Pa) thanks to mechanical connections, which minimises fan energy use and sound production
- TÜV SÜD and ISEGA tested and certified, REACH compliant

Product dimensions

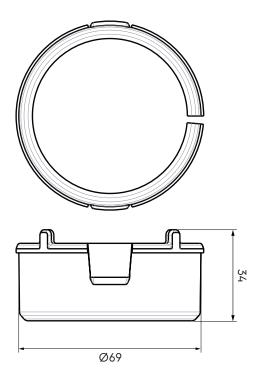







Technical specifications

| Specifications | |
|----------------|--------------|
| Technical | |
| Colour | Red |
| Material | PP |
| Anti static | \checkmark |

© 2024 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country. I UB-13-02-2024-INT-EN

Air Excellent AE23C Click Ring



Article number: 188390

Technical specifications (continuation)

| Technical | | |
|-------------------------------|--------------|--|
| Antimicrobial | \checkmark | |
| Performance | | |
| Temperature resistance (min.) | -20 °C | |
| Temperature resistance (max.) | 60 °C | |
| Reaction to fire: Euro class | Е | |
| Dimensions | | |
| Length gross | 69 mm | |
| Width | 69 mm | |
| Height | 34 mm | |
| Net weight | 0.1 kg | |