

# Ubipass Cable and duct entry Insulated 120 0° Alu

Article number: 770221


## Product overview

The Ubipass insulated cable and duct entry system is designed for seamless installation and optimal protection. Featuring a hinged hood for easy access, it simplifies the placement of heat pump pipes and cable bundles with its large internal diameter. With an integrated bird and leaf guard, the system stays protected from external elements. Compatible with universal and brand-independent systems, this entry solution is the perfect choice for reliable performance across various setups.

- Hinged hood for easy installation
- Integrated bird and leaf guard
- Large internal diameter for easy placement of heat pump pipes and cable bundles
- Universal and brand independent systems



## Product dimensions

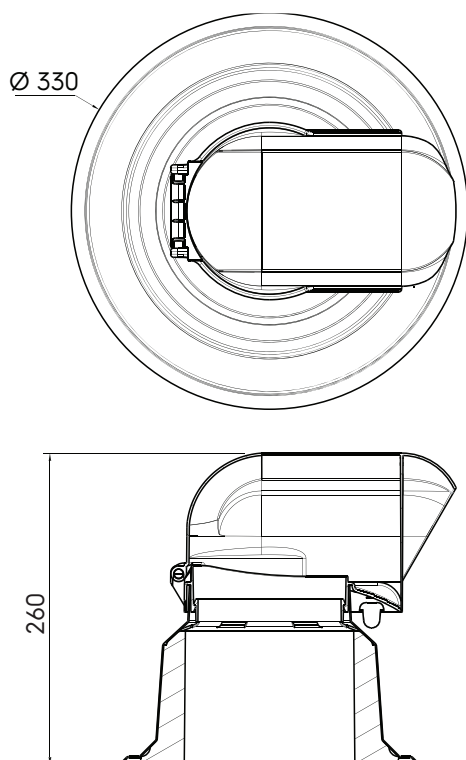

# Ubipass Cable and duct entry Insulated 120 0° Alu

Article number: 770221

## Technical specifications

| General                  |                                     |
|--------------------------|-------------------------------------|
| Type                     | Cable Outlets                       |
| Technical                |                                     |
| Colour                   | Black                               |
| Material                 | ALU/PP                              |
| Bird protection          | <input checked="" type="checkbox"/> |
| Flashing                 | <input checked="" type="checkbox"/> |
| Flashing diameter        | 330 mm                              |
| Flashing height          | 150 mm                              |
| Flashing material        | Aluminium                           |
| Insulated                | <input checked="" type="checkbox"/> |
| Throughput diameter      | 120 mm                              |
| Performance              |                                     |
| Can be glued             | <input type="checkbox"/>            |
| Self adhesive            | <input type="checkbox"/>            |
| UV resistance            | <input checked="" type="checkbox"/> |
| Installation             |                                     |
| Roof type                | Flat                                |
| Roof angle (min.)        | 0 °                                 |
| Roof angle (max.)        | 0 °                                 |
| Dimensions               |                                     |
| Length gross             | 330 mm                              |
| Width                    | 330 mm                              |
| Height                   | 260 mm                              |
| Height overroof          | 260 mm                              |
| Net weight               | 0.501 kg                            |
| Logistical               |                                     |
| Gross weight             | 1.124 kg                            |
| Packaging / Trade length | 393 mm                              |
| Packaging / Trade width  | 393 mm                              |
| Packaging / Trade height | 260 mm                              |