

Cable and pipe roof terminal 120 0° Alu Resitrix SK-W insulated


Article Number: 0770222

Product introduction

The insulated cable and pipe penetration system offers a smart, fire-safe installation method by using a hot air gun instead of a burner, ensuring safety and convenience during operations. The hinged cap ensures easy access, while the large inner diameter effortlessly accommodates heat pump pipes and cable bundles. With an integrated bird and leaf guard, the system remains protected from external elements. Compatible with universal and brand-independent systems, this input solution is versatile and designed for fast, reliable performance in any set-up.

- Hinged hood for easy installation
- Integrated bird and leaf protection
- Large inside diameter for easy placement of heat pump pipes and cable bundles
- Compatible with universal and brand-independent systems
- Easy and fire-safe installation by using a hot air gun instead of a burner

Product dimensions

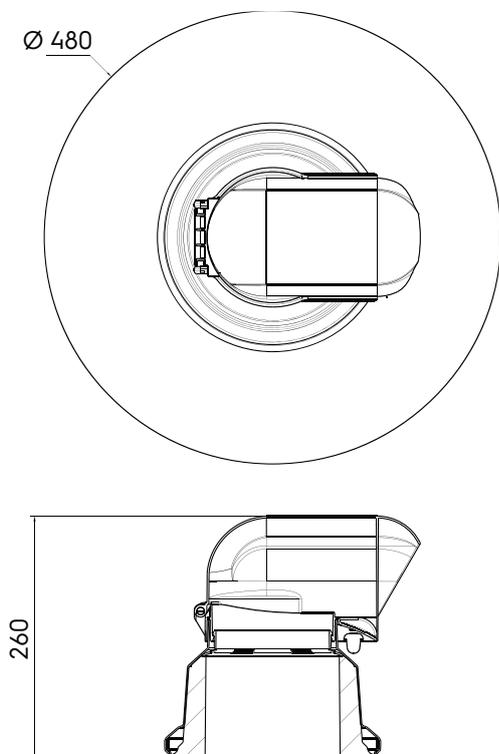

Cable and pipe roof terminal 120 0° Alu Resitrix SK-W insulated

Article Number: 0770222

Technical specifications

Specifications	
General	
Article type	Cable ducts
Technical	
Colour	Black
Material	ALU/PP
Bird protection	<input checked="" type="checkbox"/>
Indent	<input checked="" type="checkbox"/>
Adhesive plate diameter	480 mm
Adhesive plate height	150 mm
Framing material	Resitrix SK-W
Insulated	<input checked="" type="checkbox"/>
	120
Performance	
Can be glued	<input checked="" type="checkbox"/>
Self-adhesive	<input type="checkbox"/>
UV resistance	<input checked="" type="checkbox"/>
Installation	
Roof type	Flat
Roof angle (min.)	0 °
Roof angle (max.)	0 °
Dimensions	
Length	480 mm
Width	480 mm
Height	260 mm
Height above roof	260 mm
Net weight	1.546 kg
Logistics	
Gross weight	1.546 kg
Packaging/length	393 mm
Packaging / width	393 mm
Packing / height	260 mm