Ubipass Cable and duct entry Insulated 0° Alu

Article number: 770209

Product overview

The Ubipass cable and duct entry for air conditioning, photovoltaic and solar thermal panels provides a safe and watertight solution for routing cables and pipes through the roof. It allows the passage of up to 6 cables with a diameter ranging from 4 to 8 mm, or 2 pipes with a maximum diameter of 50 mm. Thanks to its fully watertight installation, there is no risk of cable wear over time. The Ubipass cable entry is perfectly suited for roofs with EPDM, PVC and TPO waterproofing membranes, ensuring a reliable and durable installation.

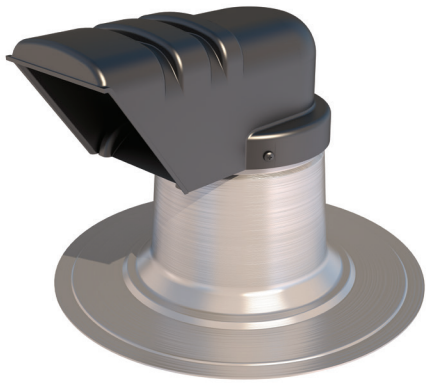

- Completely watertight connection
- UV-resistant
- Suitable for all types of cables and pipes
- Universal and brand independent systems
- Practical and fast flat roof installation

Product dimensions

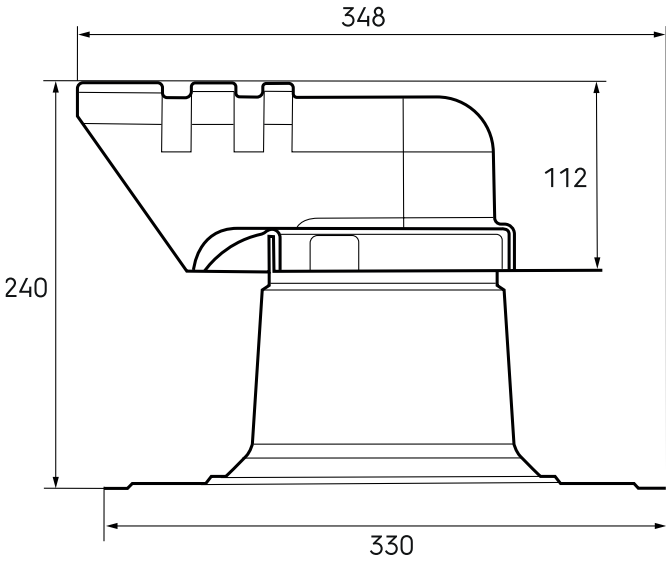

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-18-09-2026-INT-EN

Ubipass Cable and duct entry Insulated 0° Alu

Article number: 770209

Build smart.

Technical specifications

General	
Type	Cable Outlets
Technical	
Colour	Black
Material	PE
Flashing	☑
Flashing diameter	330 mm
Flashing height	150 mm
Flashing material	Aluminium
Insulated	☑
Throughput diameter	125 mm
Performance	
Can be glued	☑
Self adhesive	☒
UV resistance	☑
Installation	
Roof type	Flat
Dimensions	
Length gross	348 mm
Width	330 mm
Height	240 mm
Height overroof	240 mm
Net weight	0.88 kg
Logistical	
Number per packaging	1
Gross weight	0.88 kg
Packaging / Trade length	393 mm
Packaging / Trade width	393 mm
Packaging / Trade height	246 mm

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-18-09-2026-INT-EN