

# Solar Roof Tile 0°

Article number: 770209


## Product introduction

This Ubbink terminal can be used to feed solar PV cables through flat roofs. Includes an ALU flange.

The range of Ubbink Solar-Air Conditioning cable and pipe transits offers several solutions for the cables of PV panels, air conditioning and thermal pipes in a safe and easy way.

- For PV, Air Conditioning & Solar thermal pipes
- Maximum safety and security
- Universal and brand independent systems
- Practical and fast flat roof installation
- Durable

## Product dimensions

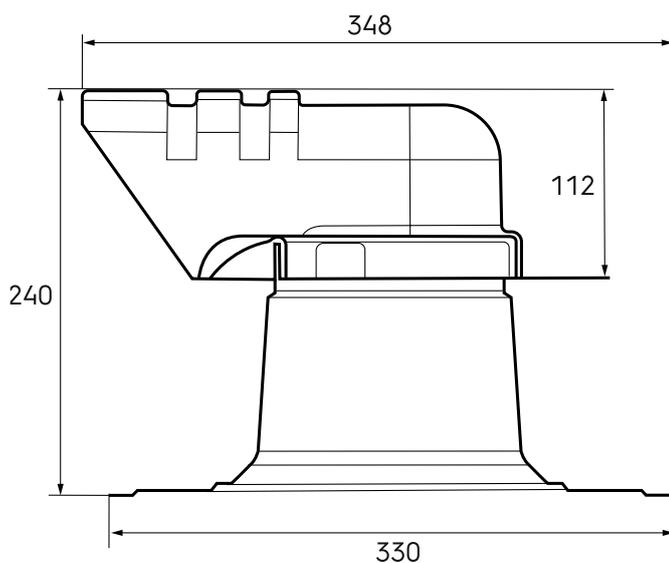

## Application

- Flat roof entry for PV
- Air Conditioning
- Thermal pipes

## Additional information

- For roof pitches 0°- 10°



# Solar Roof Tile 0°

Article number: 770209

## Technical specifications

Specifications	
Technical	
Colour	Black
Material	PE
Flashing	<input checked="" type="checkbox"/>
Flashing diameter	330 mm
Flashing height	150 mm
Flashing material	Aluminium
Diameter	125 mm
Performance	
UV resistance	<input checked="" type="checkbox"/>
Installation	
Roof type	Flat
Dimensions	
Length gross	348 mm
Width	330 mm
Height	240 mm
Height overroof	240 mm
Net weight	0.88 kg