

# FlatRoofVent Roof Terminal 110 Black


Article number: 169931

## Product introduction

- The Ubbink OFT range vents are capped stacks for use in the below roof types. There are five flange types for different roof covering that suit the OFT1 range ranging from 110mm diameter to 166mm.
- With the following roof finishes:
  - Asphalt
  - Built up felt
  - EPDM
  - Bitumen
  - GRP roofs
- The OFT/1 range is suitable for use with soil and vent systems and for both mechanical and natural (passive) ventilation installations. It offers a large free vent area with a low Pascal resistance figure.
- Large free vent area/Low Pa resistance
- Made of high-quality PP
- Applicable for all weather conditions
- High ventilation capacity
- No rain ingress
- Elegant design
- For new build and renovation purposes



## Product dimensions

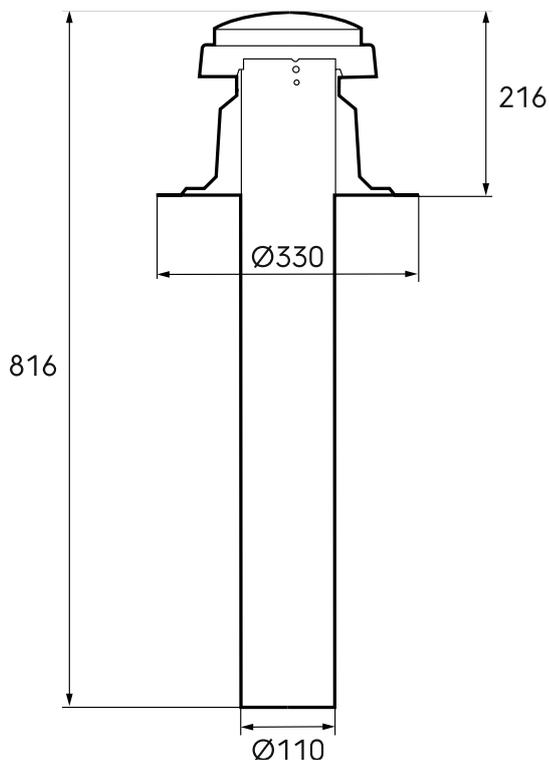

# FlatRoofVent Roof Terminal 110 Black

Article number: 169931

## Performance

The OFT/I range is suitable for use with soil and vent systems and for both mechanical and natural (passive) ventilation installations. It offers a large free vent area with a low Pascal resistance figure.

## Application

- They are suitable for use with soil & vent systems and for both mechanical and natural (passive) ventilation installations (available in all materials).
- Allows termination through a flat roof to ducting up to 166mm.
- With the spigot cut to 50mm allows ventilation into a flat roof to meet the requirements of.

## Kit content

- Stack pipe
- Cap
- Flashing to suit roof covering

## Additional information

- The external height of all OFT's cannot be reduced
- The internal spigot length can be reduced to suit the installation needs
- The ducting that is used must be the same diameter as the spigot from the extract fan all the way through the terminal
- In a cold roof void all ducting must be insulated to reduce condensation risk

## Product support

- Material:
- Asphalt: Polyethylene/Aluminium
- Felt: Polyethylene
- EPDM: Polyethylene/Aluminium/EPDM
- Bitumen: Polyethylene/Aluminium/Bitumen
- PVC: Polyethylene/Aluminium/PVC
- Polyethylene material is fire retardant
- Available in:
- Black (Stack section only)

## Technical specifications

Specifications	
Technical	
Colour	Black
Diameter	110 mm
Installation	
Roof angle (min.)	0 °
Roof angle (max.)	10 °
Dimensions	
Length gross	330 mm
Width	330 mm
Height	817 mm
Net weight	1.77 kg