

Solar Roof Tile 15-55°

Article number: 770207


Product introduction

The roof tile allows secure cable and pipe penetration for solar panels, heat pumps, and air conditioners. It supports up to two cables with a maximum diameter of 50 mm, preventing tile breakage and cable wear by eliminating the need to route cables between tiles. The integrated Ubiflex waterproofing flashing ensures a watertight seal and adapts seamlessly to the tile's shape.

- Watertight connection
- No risk of tiles breaking
- No deterioration of cables over time
- U.V. resistant
- Easy and quick installation



Product dimensions

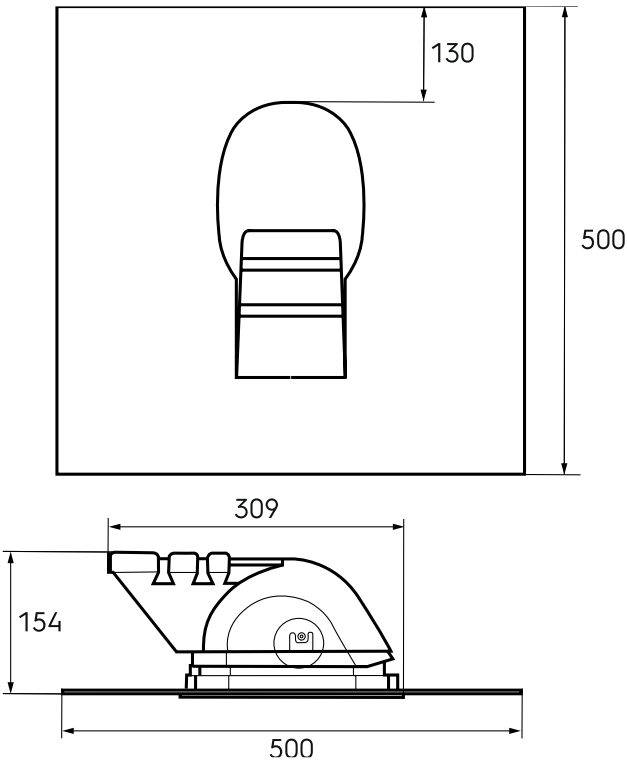

Technical specifications

Specifications	
Technical	
Colour	Black
Material	PE
Flashing	<input checked="" type="checkbox"/>

Solar Roof Tile 15-55°



Article number: 770207

Technical specifications (continuation)

Technical	
Flashing length	500 mm
Flashing width	500 mm
Flashing material	Ubiflex standard
Performance	
UV resistance	<input checked="" type="checkbox"/>
Installation	
Roof type	Pitch
Dimensions	
Length gross	500 mm
Width	500 mm
Height	140 mm
Net weight	1.6 kg