

OFT 4 Uninsulated Flat Roof Terminals

Product features and benefits

- Large free vent area/low Pa resistance
- The pipework above the roofline is twin walled and incorporates an integral condensation drain


Application

- Allows termination through a flat roof to ducting up to 166mm

Material Per Roof Type •

- Asphalt: Polyethylene/Aluminium
- EPDM: Polyethylene/Aluminium/EPDM
- Bitumen: Polyethylene/Aluminium/Bitumen
- PVC: Polyethylene/Aluminium/PVC

Polyethylene material is a fire retardant

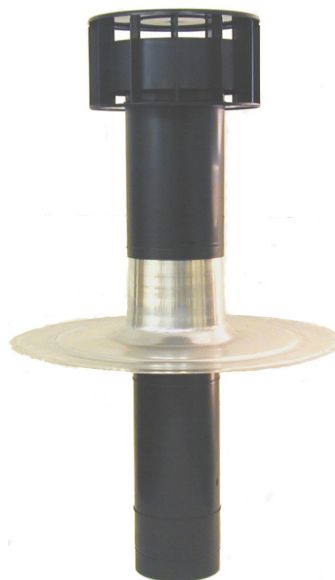

Colours

- Black (Stack section only)

Product Codes

	ASPHALT	EPDM	BITUMEN	PVC
OFT4 110mm	50185736	-	-	-
OFT4 131mm	50147004)\$% +\$\$*	50147008	50147010
OFT4 166mm	50147138)\$% +\$(50147042	50147044

Weights

	ASPHALT	EPDM	BITUMEN	PVC
OFT4 110mm	1.78 kg	-	-	-
OFT4 131mm	1.73 kg	1.68 kg	2.3 kg	1.72 kg
OFT4 166mm	2.67 kg	2.66 kg	3.28 kg	2.71 kg

Dimensions and Performance

*Reading at 225mm ³/h

Diameter	Heigh Above Roof	Flange Dia	Depth Below Roof	Free Vent Area	* Pa Resistance
mm	mm	mm	mm	mm ²	Extract
110mm	300	395	350	8,400	<1.0
131mm	400	490	350	12,000	<1.0
166mm	540	490	510	20,000	<1.0

NB Reducers available

- 131/110 reducer (147059)
- 131/125 reducer (147062)
- 167/147 reducer (147064)