2024 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country. I UB-19-12-2024-INT-EN

Air Excellent distribution box DB212V125-200VE 12 connections




Article number: 188964

Product introduction

The Air Excellent vertical DB212 is designed to radially distribute air from a ventilation unit, minimizing system pressure drop, fan energy use, and sound levels. It is compatible with Aerfoam insulated ducts and features 12 Air Excellent duct connections. With DBOX adaptors, it can connect to any duct diameter within the Air Excellent range. The compact box is ideal for small spaces, it can be installed on ceilings, walls, or floors.

- Includes stepped adaptor, 12 internal air restrictor rings, and 6 covers for unused connections
- Ideal for optimizing space in small areas
- Made of durable, rust-free, lightweight plastic (PP) for easy handling and installation
- Mechanical connections to minimize pressure loss, fan energy consumption, and sound levels

Product dimensions

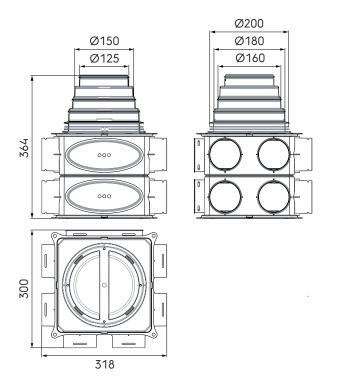



© 2024 Ubbink. All rights reserved.1 Content is subject to change without notice. Availability and configurations may differ per country. I UB-19-12-2024-INT-EN

Air Excellent distribution box DB212V125-200VE 12 connections



Article number: 188964

Technical specifications

| Specifications | |
|-------------------------------|--------------|
| Technical | |
| Colour | Grey |
| Material | PP |
| Anti static | \checkmark |
| Antimicrobial | \checkmark |
| Performance | |
| Temperature resistance (min.) | -20 °C |
| Temperature resistance (max.) | 60 °C |
| Reaction to fire: Euro class | Е |
| Dimensions | |
| Length gross | 318 mm |
| Width | 300 mm |
| Height | 364 mm |
| Net weight | 2.066 kg |

Air Excellent distribution box DB212V125-200VE 12 connections



Article number: 188964

Technical details

| Pressure Loss Dbox | | |
|--------------------|-------------------------|--|
| Qv (Volume) [m³/h] | Δp (Pressure Loss) [Pa] | |
| 50 | 1,0 | |
| 75 | 1,5 | |
| 100 | 2,0 | |
| 125 | 3,0 | |
| 150 | 5,0 | |
| 175 | 6,5 | |
| 200 | 8,0 | |
| 225 | 9,0 | |
| 250 | 10,0 | |
| 300 | 14,0 | |
| 350 | 16,0 | |

Figures are based on measurements by the TÜV SÜD.