

Ubiflex Finio 600mm x 5m Grey






Article number: 535219

Product overview

Ubiflex Finio is a high-quality, non-lead flashing for reliable building waterproofing. Lightweight and flexible, it easily adapts to complex shapes for numerous roof and wall applications. Its patented double-safety adhesion combines integrated butyl strips with a full adhesive backside that vulcanises with the substrate for long-term performance. Ubiflex Finio can easily be formed by hand and as required be finished with a roller.

- Patented double-safety adhesion for long-term reliability
- Easy and quick installation with initial fixation that allows repositioning
- Adhesion to most common building materials
- Vulcanises with the substrate for durable performance
- KIWA-approved for a wide range of roof and wall applications, including cavity walls
- 25-year warranty

Product dimensions

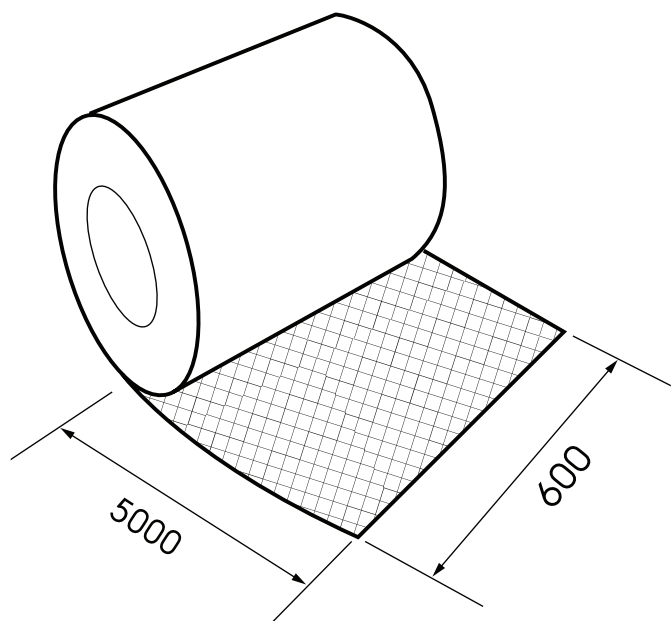

Ubiflex Finio 600mm x 5m Grey

Article number: 535219

Applications

For a perfect self-welding effect, the overlap between two pieces of Ubiflex Finio must never be less than 50 mm. Ubiflex Finio does not react to aluminum, copper and zinc. However, if Ubiflex Finio is likely to come in contact with aggressive chemicals during work or maintenance, first test on a piece of material before proceeding. If in doubt contact your reseller.

Compliance, safety and regulation

Ubiflex Finio is non-toxic, non-hazardous to human and environment.
To be defined, DO NOT DELETE

Technical specifications

Technical	
Colour	Grey
Material	Polyisobutylene (PIB)
Performance	
Temperature resistance (min.)	-30 °C
Temperature resistance (max.)	140 °C
Reinforcement	☒
Self adhesive	☒
Stretch length	97 %
Stretch width	20 %
Dimensions	
Length gross	5 m
Length gross	5000 mm
Width	600 mm
Thickness	1.9 mm
Net weight	8.4 kg

Ubiflex Finio 600mm x 5m Grey

Article number: 535219

Technical details

Watertightness

watertight	EN 1928
------------	---------

Bending characteristics (after 10 times folding)

	23°C	50%
longitudinal	✓	✓
transverse	✓	✓
EN 495-5:2013		

Tensile strength

longitudinal	225 N
transverse	675 N
EN 12311-2:2013	

UV resistance

excellent	EN 1297:2004
-----------	--------------

Sensitivity to thermal aging and moisture

not sensitive	EN ISO 16536:2019
---------------	-------------------

Resistance against corrosion

not sensitive	EN ISO 6988
---------------	-------------

Fire Rating

Class E	EN 13501-1
---------	------------