

Air Excellent 1x AE34C Valve Adaptor 125mm 90°


Article number: 188185

Product introduction

An AE34C duct accessory. Use an AE34C seal ring and an AE34C click ring to connect the AE34C duct to it.

- Modular manifolds, which can be used with all 6 duct types
- Semi-rigid plastic ducts on a roll and airtight mechanical connections, which are extremely easy to install
- Low system pressure loss due to radial design
- Airtight (class D/ATC 2 up +/- 2000 Pa) thanks to mechanical connections, which minimises fan energy use and sound production

Product dimensions

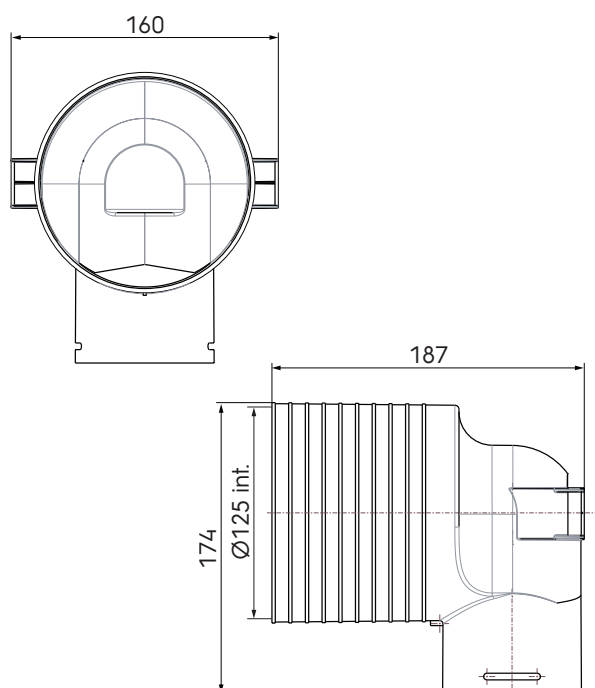

Technical specifications

Specifications	
Technical	
Colour	Green
Material	PP
Anti static	<input checked="" type="checkbox"/>
Antimicrobial	<input checked="" type="checkbox"/>
Diameter inner	125 mm

Air Excellent 1x AE34C Valve Adaptor 125mm 90°



Article number: 188185

Technical specifications (continuation)

Performance	
Temperature resistance (min.)	-20 °C
Temperature resistance (max.)	60 °C
Reaction to fire: Euro class	E
Zeta supply 1 connection	1.15
Zeta extract 1 connection	0.97
Dimensions	
Length gross	174 mm
Width	160 mm
Height	187 mm
Net weight	0.173 kg

Air Excellent 1x AE34C Valve Adaptor 125mm 90°



ubblink

Build smart.

Article number: 188185

Technical details

Zeta [-]	Air Supply		Air Extract	
	0,70		1,02	
Qv [m³/h]	v [m/s]	Δp [Pa]	v [m/s]	Δp [Pa]
0	0,0	0,0	0,0	0,0
5	0,4	0,1	0,4	0,1
10	0,9	0,3	0,9	0,5
15	1,3	0,7	1,3	1,1
20	1,8	1,3	1,8	1,9
25	2,2	2,0	2,2	3,0
30	2,7	2,9	2,7	4,3
35	3,1	4,0	3,1	5,8
40	3,6	5,2	3,6	7,6
45	4,0	6,6	4,0	9,6
50	4,5	8,2	4,5	11,9
55	4,9	9,9	4,9	14,4
60	5,3	11,8	5,3	17,1
65	5,8	13,8	5,8	20,1
70	6,2	16,1	6,2	23,3
75	6,7	18,4	6,7	26,8
80	7,1	21,0	7,1	30,5
85	7,6	23,7	7,6	34,4
90	8,0	26,5	8,0	38,6
95	8,5	29,6	8,5	43,0
100	8,9	32,8	8,9	47,6
105	9,4	36,1	9,4	52,5
110	9,8	39,6	9,8	57,6
115	10,2	43,3	10,2	63,0
120	10,7	47,2	10,7	68,6
125	11,1	51,2	11,1	74,4
130	11,6	55,4	11,6	80,5
135	12,0	59,7	12,0	86,8